

# Dryer CTR 300XT

CTR 300XT is the series' all rounder and workhorse thanks to a high capacity in a small and handy format. The machine covers a broad spectrum of damage with the three dry air outlets, two Ø 50 mm and one Ø 100 mm, giving large variation in the opportunities for use.

When drying layered constructions the machine can be flexibly connected to all our turbine models. For maximum capacity it is used together with CTR T100XT, CTR T150XT and CTR T200S.



Part no. 20300




Dry air outlet, two Ø 50 mm and one Ø 100 mm

## Technical data

Capacity +20°C, 60% RH	22 l/24hrs
Dry air volume	300 m <sup>3</sup> /h
Dry air	1 x Ø 100 mm 2 x Ø 50 mm
Humid air	Ø 75 mm
Connection	230 V/50 Hz
Regeneration battery	1000 W
Connection effect	1,215 W
Actual consumption	approx 1000 W
Noise level (3 m)	56 dB
Weight	16 kg
Size	width 325 mm depth 420 mm height 360 mm

## Capacity curve

Based on the unique XT rotor, the dehumidifier has a high capacity even at low relative humidity.

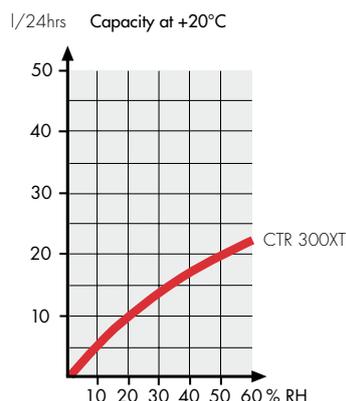

## Accessories

Hygrostat HR1-5  
Replacement filter 20184

## System solutions

Turbine CTR T100XT  
Turbine CTR T150XT  
Turbine CTR T200S